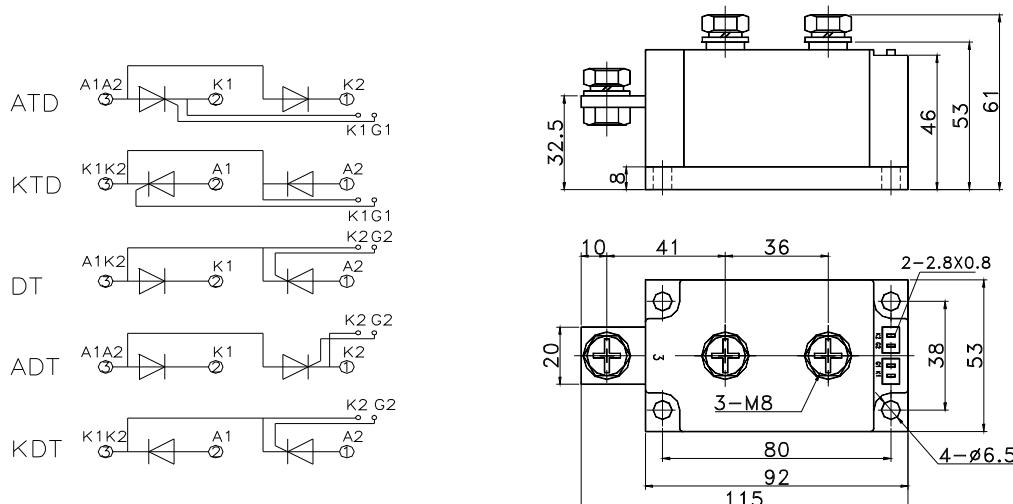


TD200 ATD200 KTD200 DT200 ADT200 KDT200

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j$ (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$ $I_{F(AV)}$	Mean on-state current	180° half sine wave 50Hz Single side cooled, $T_c=85^\circ\text{C}$	125			200	A
$I_{T(\text{RMS})}$	RMS on-state current	Single side cooled, $T_c=85^\circ\text{C}$	125			314	A
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM} \& V_{RRM}$ tp=10ms $V_{DsM} \& V_{RsM} = V_{DRM} \& V_{RRM} + 200\text{V}$ respectively	125	600		1600	V
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			30	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave	125			7.20	KA
$I^2t$	$I^2T$ for fusing coordination	$V_R=60\%V_{RRM}$				264	$\text{A}^2\text{s} * 10^3$
$V_{TO}$	Threshold voltage		125			0.80	V
$r_T$	On-state slop resistance					1.27	$\text{m}\Omega$
$V_{TM}$	Peak on-state voltage	$I_{TM}=600\text{A}$	125			1.65	V
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125			800	$\text{V}/\mu\text{s}$
$di/dt$	Critical rate of rise of on-state current	From 67% $V_{DRM}$ To 600A, Gate source 1.5A $t_r \leq 0.5\mu\text{s}$ Repetitive	125			100	$\text{A}/\mu\text{s}$
$I_{GT}$	Gate trigger current		25	30		180	mA
$V_{GT}$	Gate trigger voltage	$V_A=12\text{V}$ , $I_A=1\text{A}$		1.0		2.5	V
$I_H$	Holding current			20		100	mA
$V_{GD}$	Non-trigger gate voltage	At 67% $V_{DRM}$	125			0.2	V
$R_{th(j-c)}$	Thermal resistance Junction to heatsink	At 180° sine Single side cooled				0.140	$^\circ\text{C}/\text{W}$
$V_{iso}$	Isolation voltage	50Hz, R.M.S, t=1min, $I_{iso}:1\text{mA}(\text{MAX})$		2500			V
$F_m$	Thermal connection torque(M8)				0.45		N·m
	Mounting torque(M6)				0.30		N·m
$T_{stg}$	Stored temperature			-40		140	$^\circ\text{C}$
$W_t$	Weight				930		g
Outline		401F3					

## OUTLINE DRAWING & CIRCUIT DIAGRAM



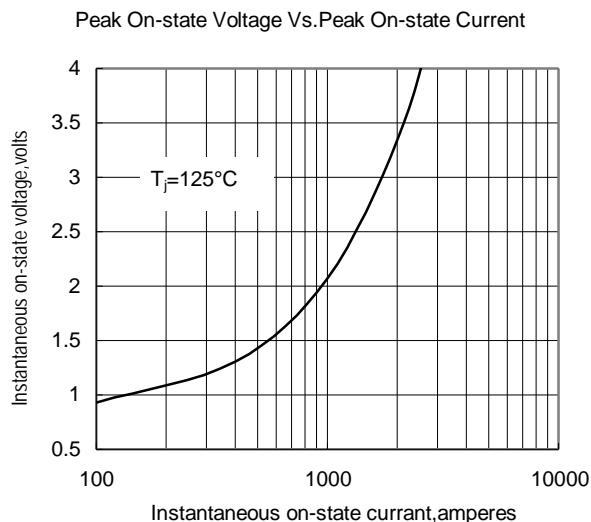


Fig.1

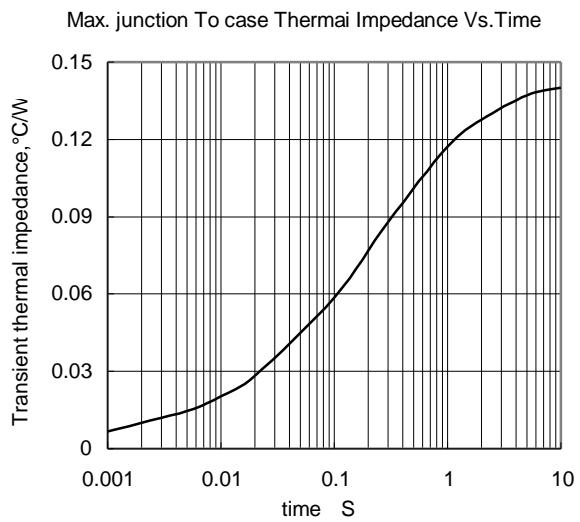


Fig.2

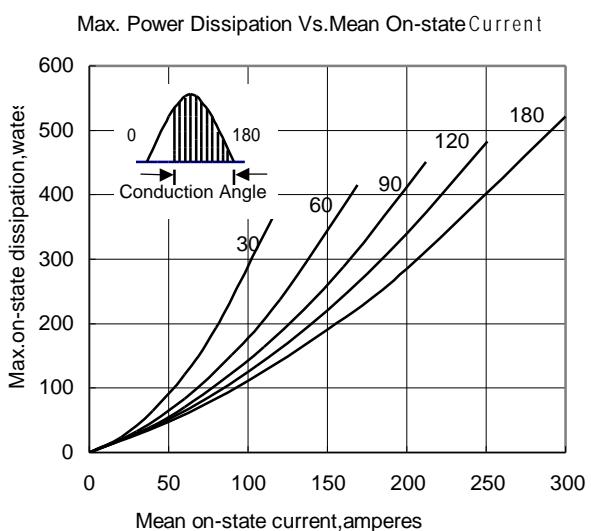


Fig.3

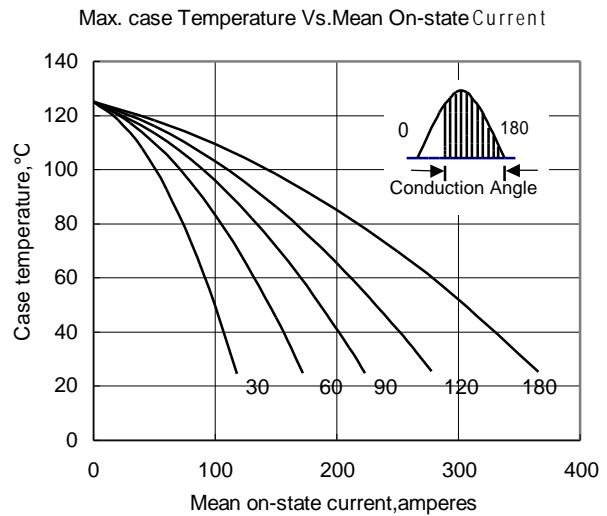


Fig.4

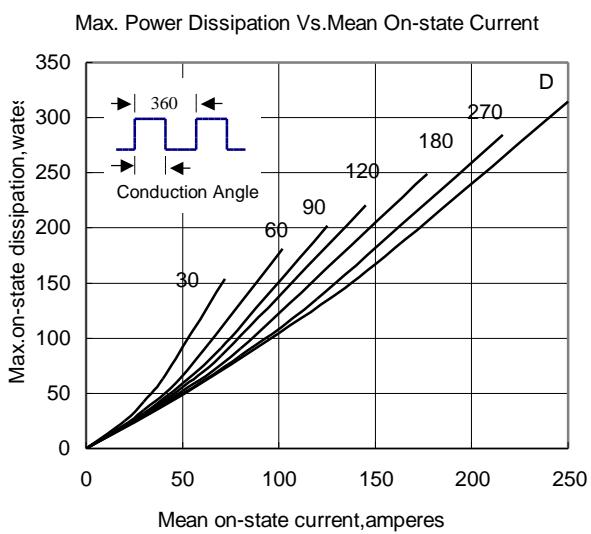


Fig.5

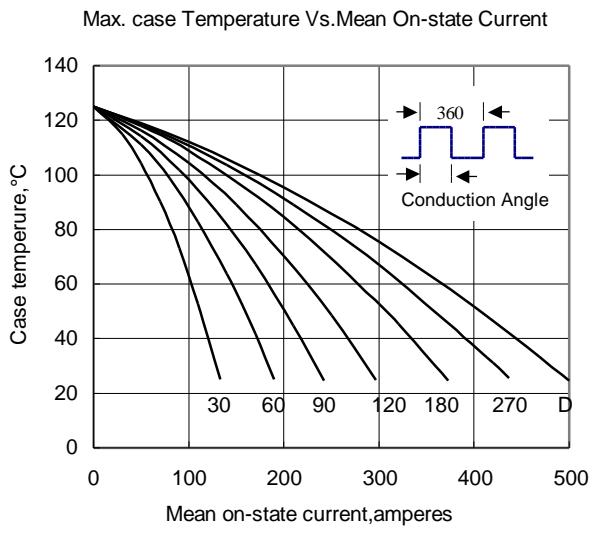


Fig.6

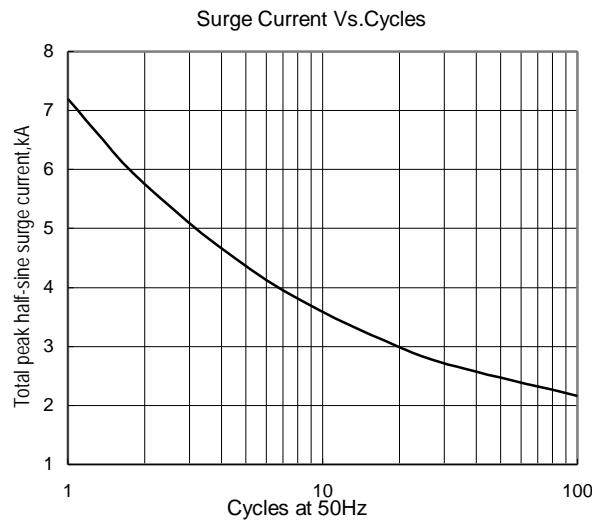


Fig.7

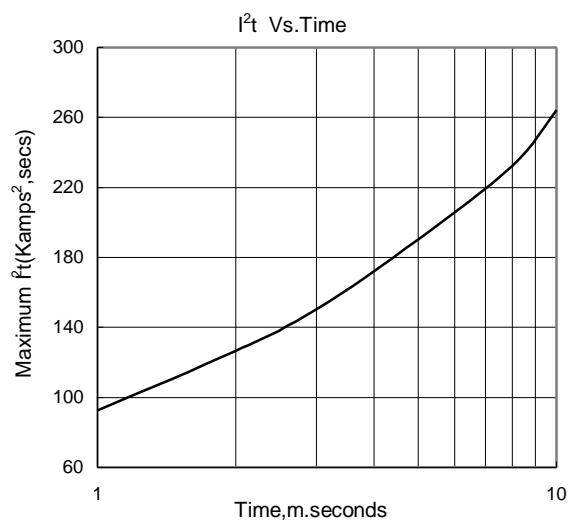


Fig.8

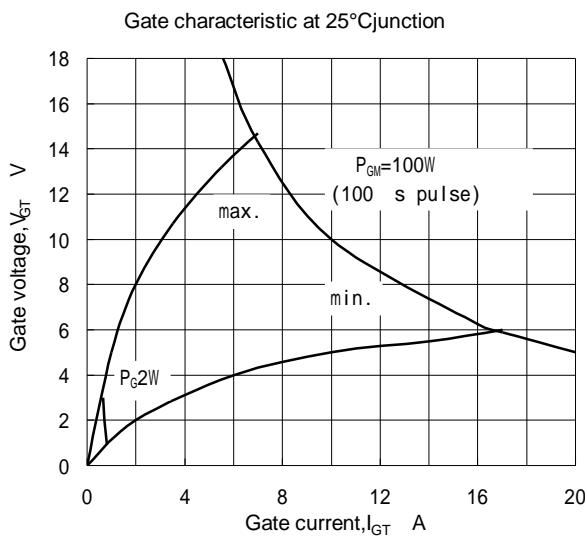


Fig.9

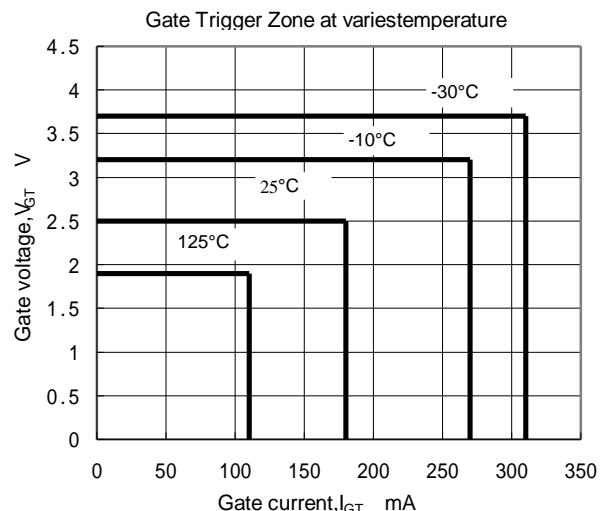


Fig.10