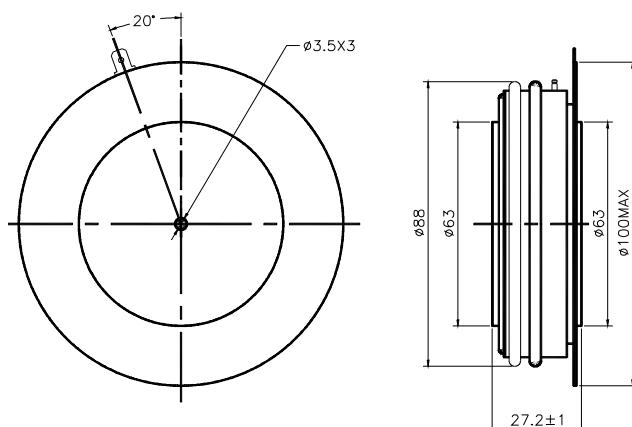


SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_J(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{T(\text{AV})}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, $T_{hs}=55^{\circ}\text{C}$	125			2477	A
$I_{T(\text{AV})}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, $T_{hs}=80^{\circ}\text{C}$	125			1822	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{\text{DRM}} \& V_{\text{RRM}}$ tp=10ms $V_{\text{DsM}} \& V_{\text{RsM}} = V_{\text{DRM}} \& V_{\text{RRM}} + 100\text{V}$ respectively	125	800		1800	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			120	mA
I_{TSM}	Surge on-state current	10ms half sine wave	125			37	KA
I^2T	I^2T for fusing coordination	$V_R=0.6V_{\text{RRM}}$				6845	$\text{A}^2\text{s} * 10^3$
V_{TO}	Threshold voltage		125			0.87	V
r_T	On-state slop resistance					0.13	$\text{m}\Omega$
V_{TM}	Peak on-state voltage	$I_{\text{TM}}=4000\text{A}, F=32\text{KN}$	125			1.38	V
dv/dt	Critical rate of rise of off-state voltage	$V_{\text{DM}}=0.67V_{\text{DRM}}$	125			300	$\text{V}/\mu\text{s}$
di/dt	Critical rate of rise of on-state current	From 67% V_{DRM} to 2000A, Gate source 1.5A $t_r \leq 0.5\mu\text{s}$ Repetitive	125			400	$\text{A}/\mu\text{s}$
I_{rm}	Reverse recovery current	$I_{\text{TM}}=1500\text{A}, tp=1000\mu\text{s},$ $di/dt=-20\text{A}/\mu\text{s},$ $V_r=50\text{V}$	125			170	A
t_{rr}	Reverse recovery time					20	μs
Q_{rr}	Recovery charge					1700	μC
I_{GT}	Gate trigger current	$V_A=12\text{V}, I_A=1\text{A}$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			20		300	mA
V_{GD}	Non-trigger gate voltage	At 67% V_{DRM}	125			0.3	V
$R_{\text{th(j-h)}}$	Thermal resistance Junction to heatsink	At 180° sine double side cooled Clamping force 32KN				0.017	$^{\circ}\text{C}/\text{W}$
F_m	Mounting force				27	34	KN
T_{stg}	Stored temperature			-40		140	$^{\circ}\text{C}$
W_t	Weight					850	g
Outline		KT60cT65					

Outline



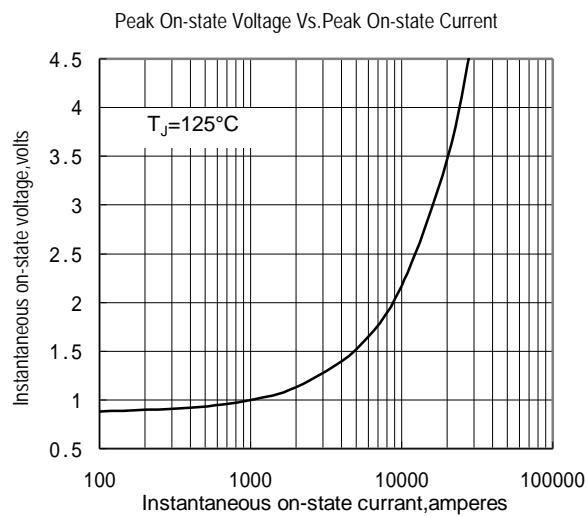


Fig.1

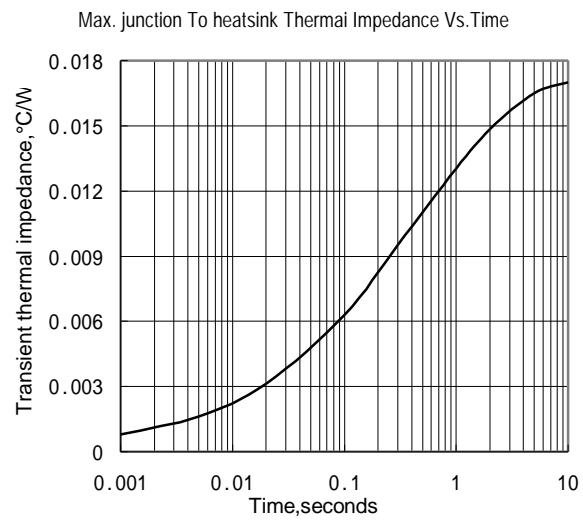


Fig.2

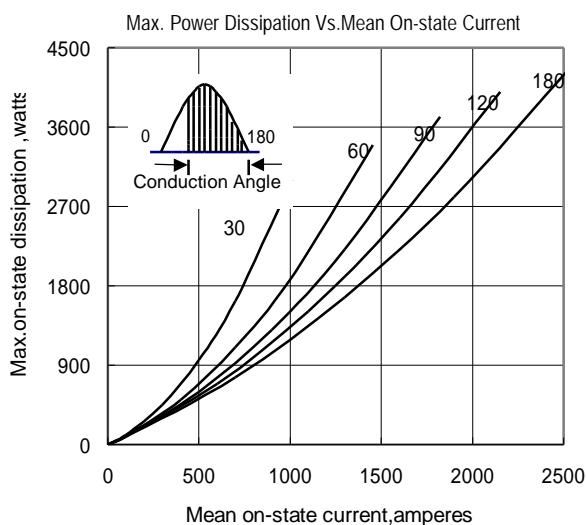


Fig.3

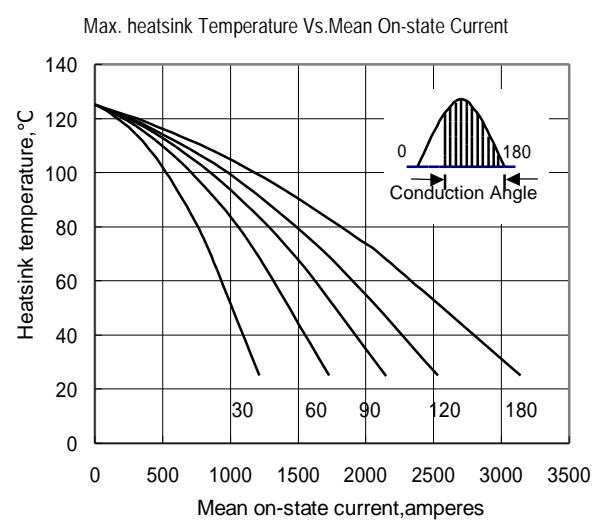


Fig.4

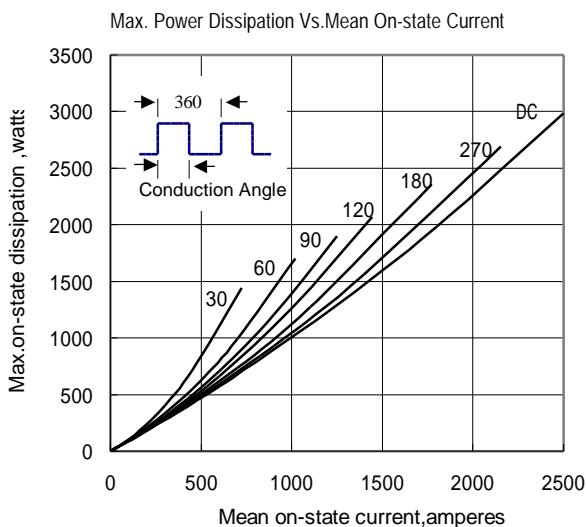


Fig.5

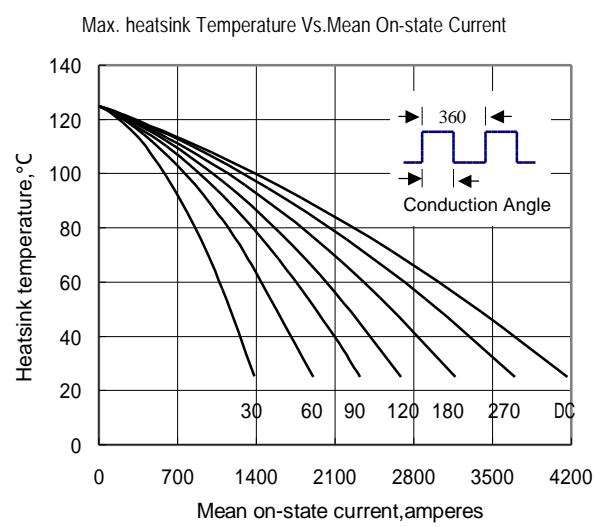


Fig.6

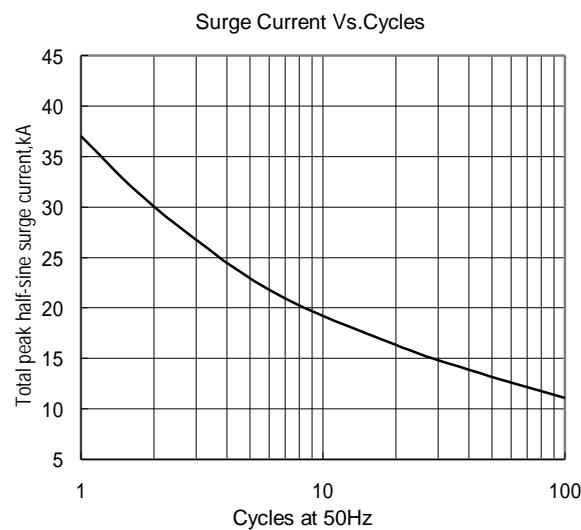


Fig.7

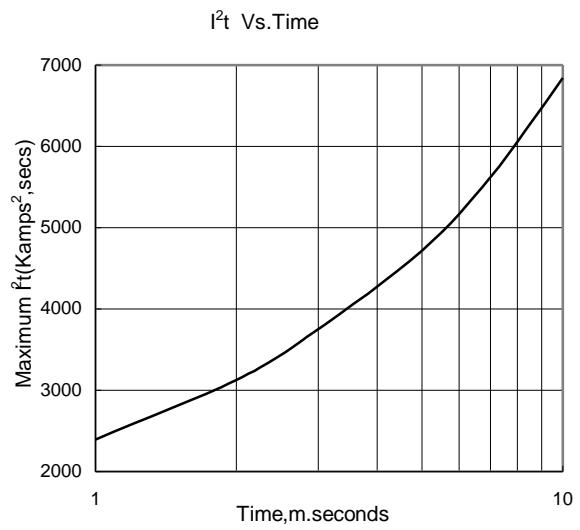


Fig.8

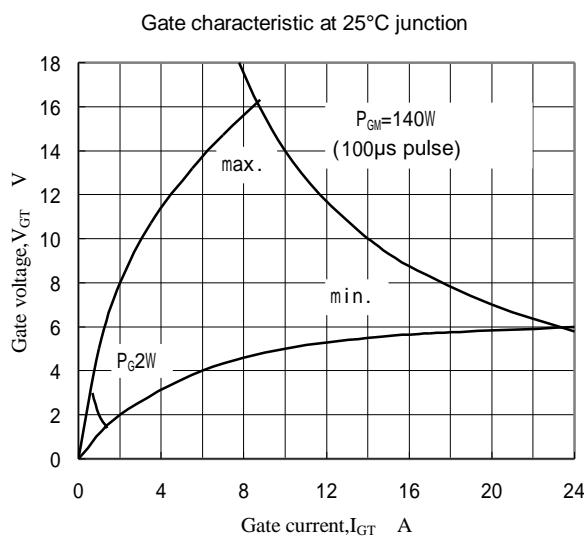


Fig.9

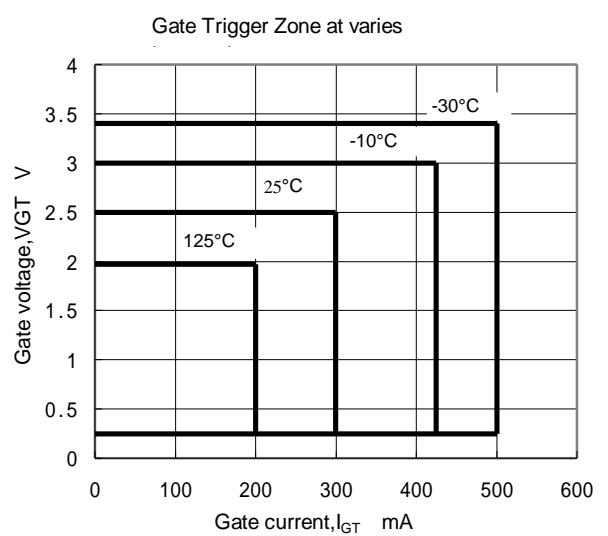


Fig.10